

Model AP Mechanical Dynamometer

Accuracy: ± 0.5% of capacity

Temperature Range: -45° to 60° C

Ultimate Safety Factor:

See table on cover for minimum USF

Construction:

Pressure bar—
High-grade E4340 alloy steel or 7075-T651 aluminum

Shackles –
A4140 forged steel (machined from E4340 steel)

Shackle pins –
Machined from E4340 steel

Case Housing:

5" models are equipped with high strength composite plastic case.

10" models use cast aluminum enclosure.

Corrosion Protection: Pressure bar protected with durable powder coat paint. Shackles and pins are electroless nickel plated. All integral machining and fasteners are produced from noncorrosive materials or have suitable plating.

Zero Control: Zero up to 20% of capacity. Zeroed load must be considered as part of ultimate load.

Calibration: Traceable to NIST.

Documentation: Includes User's Guide and signed calibration card.

Carry Case/Crate:

Low/Med capacity 5" dial – includes plastic carry case
Low/Med capacity 10" dial – optional steel carry case
All high capacity – includes reinforced plywood crate

Periodic Proof Loads: Controlled 150% proof loads permitted annually.

Approval: CE

Shipping and packing (approximate weights):

5" Low and Med Capacities

Net weight	4.1 kg
Shipping weight	6.8 kg
Shipping box	41 x 28 x 18 cm

10" Low and Med Capacities

Net weight	4.6 kg
Shipping weight	7.3 kg
Shipping weight <i>(with optional steel case)</i>	11.8kg
Shipping box	36 x 36 x 18 cm

30,000 – 50,000 lb (20,000 kg) High Capacity

Net weight	29.0 kg
Shipping weight	44.5 kg
Shipping crate	95 x 33 x 27 cm



AP Dynamometer Specifications



Pound Capacities

5" (125 mm) Dial Size		10" (250 mm) Dial Size		Ultimate Safety Factor	
Part Number	Cap x Division Size	Part Number	Cap x Division Size		
LOW	30006-0019	500 x 5	N/A	5:1	
	30006-0027	1,000 x 10	30007-0026	1,000 x 5	5:1
	30006-0035	2,000 x 20	30007-0034	2,000 x 10	5:1
	30006-0043	4,000 x 25	N/A		5:1
	30006-0050	5,000 x 50	30007-0059	5,000 x 20	5:1
	30006-0076	8,000 x 50	30007-0075	8,000 x 50	5:1
	30006-0084	10,000 x 100	30007-0083	10,000 x 50	5:1
MED	30006-0092	15,000 x 100	30007-0091	15,000 x 100	5:1
	30006-0100	20,000 x 200	30007-0109	20,000 x 100	4.5:1
HIGH	N/A		30784-0017	30,000 x 200	5:1
	N/A		30784-0033	50,000 x 200	3:1



Kilogram Capacities

5" (125 mm) Dial Size		10" (250 mm) Dial Size		Ultimate Safety Factor	
Part Number	Cap x Division Size	Part Number	Cap x Division Size		
LOW	30006-0134	500 x 5	30007-0133	500 x 2	5:1
	30006-0159	1000 x 10	30007-0158	1000 x 5	5:1
	30006-0126	2000 x 20	30007-0125	2000 x 10	5:1
	30006-0167	4000 x 25	N/A		5:1
	N/A		30007-0174	5000 x 20	5:1
		30006-0118	10000 x 100	30007-0117	10000 x 50
HIGH	N/A		30784-0058	20000 x 100	4:1




Model AP Dynamometer Dimensions

Dimensions in inches (mm)
 Drawing scales differ between capacities
 Dimensions subject to manufacturer /supplier tolerances and
 are subject to change without notice.



Low & Medium Capacities 500-20,000 lb / 200-10,000 kg

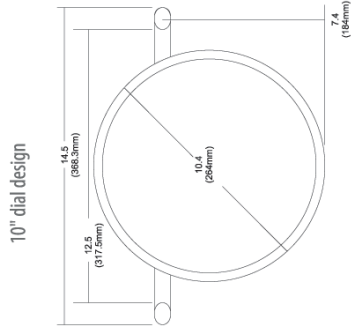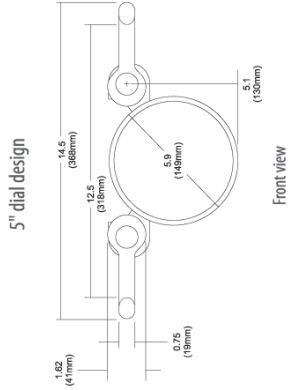

Optional Oversize Shackle

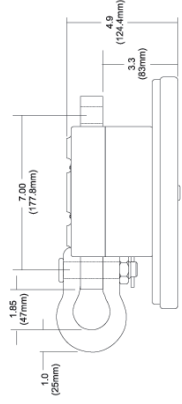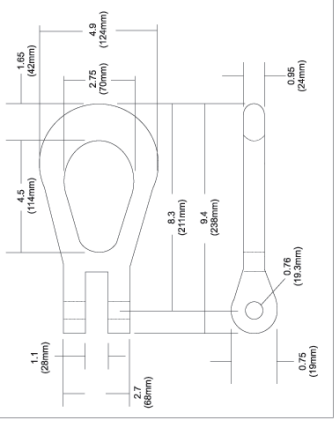

Standard Shackle



High Capacities 30,000-50,000 lb / 15,000-20,000 kg

For smaller, lighter and/or anchor shackles see Dillon APxtreme.

